



# SUBMITTAL INFORMATION

## Ductile Iron Transition Coupling - (FC2A-xxxx-xxxx style)



14" - 24" STYLE FC2A COUPLINGS FOR JOINING PIPES WITH THE SAME OR DIFFERENT O.D.'S

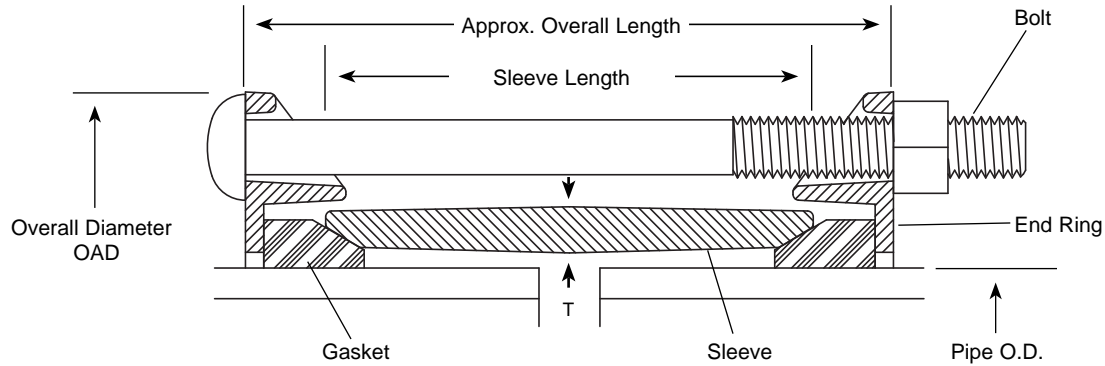

NOM. PIPE SIZE	GASKET RANGE 1ST HALF CAT. #	END RING COLOR	By	GASKET RANGE 2ND HALF CAT. #	END RING COLOR	CENTER SLEEVE		BOLTS			APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
						LGTH.	APPROX. (T) THICKNESS	DIA.	LGTH.	QTY.					
14"	15.30 - 15.70	Blk	X	15.30 - 15.70	Blk	6"	1/2"	5/8"	9"	9	7-1/8"	21"	83	▼ FC2A-1570-1570	
	15.30 - 15.70	Blk		16.00 - 16.35	Red									▼ FC2A-1570-1635	
	15.30 - 15.70	Blk		16.40 - 16.88	Wht/Gry									▼ FC2A-1570-1688	
	16.00 - 16.35	Red		16.00 - 16.35	Red									▼ FC2A-1635-1635	
	16.00 - 16.35	Red		16.40 - 16.88	Wht/Gry									▼ FC2A-1635-1688	
	16.40 - 16.88	Wht/Gry		16.40 - 16.88	Wht/Gry									▼ FC2A-1688-1688	
16"	17.40 - 17.80	Blk	X	17.40 - 17.80	Blk	6"	1/2"	5/8"	9"	10	7-1/8"	23-5/16"	103	▼ FC2A-1780-1780	
	17.40 - 17.80	Blk		18.45 - 18.97	Wht/Gry									▼ FC2A-1780-1897	
	17.40 - 17.80	Blk		18.90 - 19.20	Wht/Gry									▼ FC2A-1780-1920	
	18.45 - 18.97	Wht/Gry		18.45 - 18.97	Wht/Gry									▼ FC2A-1897-1897	
	18.45 - 18.97	Wht/Gry		18.90 - 19.20	Wht/Gry									▼ FC2A-1897-1920	
	18.90 - 19.20	Wht/Gry		18.90 - 19.20	Wht/Gry									▼ FC2A-1920-1920	
18"	19.50 - 20.00	Blk	X	19.50 - 20.00	Blk	7"	1/2"	5/8"	10-1/2"	11	8-1/8"	24-1/2"	117	▼ FC2A-2000-2000	
20"	21.60 - 22.06	Blk	X	21.60 - 22.06	Blk	7"	9/16"	5/8"	10-1/2"	12	8-1/8"	26-13/16"	137	▼ FC2A-2260-2260	
24"	25.80 - 26.32	Blk	X	25.80 - 26.32	Blk	10"	11/16"	5/8"	13-1/2"	14	11-1/16"	31-1/8"	211	▼ FC2A-2632-2632	

**Note:** Flexible Couplings do not restrain axial forces on piping.

▼ UL Classified to ANSI/NSF Standard 61.

### FEATURES

- Center Sleeve: Ductile Iron per ASTM A536 (65-45-12)
- End Rings: Ductile Iron per ASTM A536 (65-45-12)
- Bolts and Nuts: High strength low alloy steel per ASTM A242 or AWWA C111
- Coating: Black Alkyd Enamel Shop Coat NSF61 Approved
- Gasket: Molded SBR Rubber per ASTM D2000, M4AA810

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

04/22/09

Submitted By: